

18" subwoofer



 **PSRX718S**


18" High Power Subwoofer

The PSRX718S subwoofer's compact design is equally at home as a small, high-performance satellite subwoofer system or as a building block for larger subwoofer arrays.


- Application:**
- 18 inch, 2268H Differential Drive® woofer for extended low-frequency output.
 - Large port area for reduced distortion.
 - 20mm threaded pole socket for solid, secure satellite speaker mounting.


TECHNIQUE INDEX

Model	PSRX718S
Rated/Continuous/Peak power	800W/1600W/3200W
Maximum SPL	122dB/125dB/128dB
Sensitivity (1m/1W)	96dB
Frequency Range	31 Hz - 220 Hz (-10 dB)
Dimensions (H x W x D)	508 mm x 597 mm x 749 mm (20.0 in x 23.5 in x 29.5 in)
Frequency Response	34 Hz - 220 Hz (+3 dB)
Net Weight	36 kg (79 lb.)



Dual 15" two-way

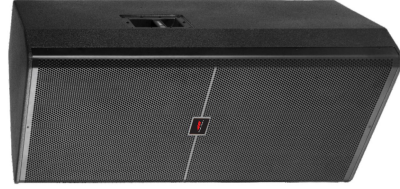

 **PSRX725**

Dual 15" High-Power Two-Way Loudspeaker

For the ultimate in performance and simplicity, a pair of PSRX725 speakers, and a single, high-power amplifier delivers superb high-level music and powerful bass.

Application:

- Light-weight and very high-power.
- Dual 380 mm (15 inch) Differential Drive® low-frequency drivers for extended low-frequency output.
- 75 mm (3 in) voice-coil compression driver for high-power capacity and very lightweight.
- 75° x 50° coverage.
- Beamfilled or full-range passive operation.
- On PSRX725F model, five suspension points may be used with optional M10 eyeballs or detachable track fittings.

TECHNIQUE INDEX

Model	PSRX725
Configuration	100 core 220 magnetic LF, 75 core HF
Frequency Range	37 Hz - 20kHz (-10 dB)
Frequency Response	53 Hz - 20 kHz (+3 dB)
Sensitivity (1m/1W)	96dB
Rated/Continuous/Peak power	1000W/2000W/4000W
Maximum SPL	128dB/131dB/134dB
Coverage Pattern	75° x 50° nominal
Net Weight	45 kg (100 lb.)
Dimensions (H x W x D)	1219 mm x 594 mm x 508 mm (48 in x 21.3 in x 20 in)

