
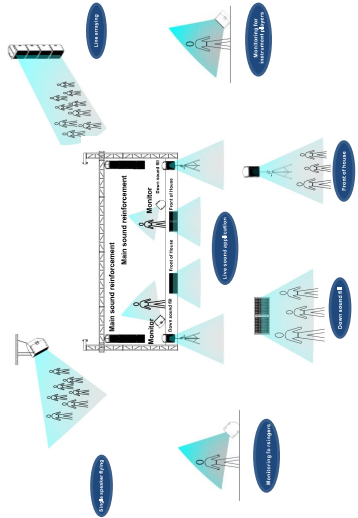


### AT-115DSP MAGIC SPEAKER


Imaging there is a simple solution for the sound system, one type of speakers could provide the most flexibilities, to be used in as many different applications as it can be:

1. Main sound reinforcement
2. Side fill
3. Stage monitor
4. Front of house
5. Rigging as line array

What's more with AT-115DSP  
 1000W Class D amp  
 DSP processing  
 Rotatable Horn  
 Pole mounting / Stacking / Flying

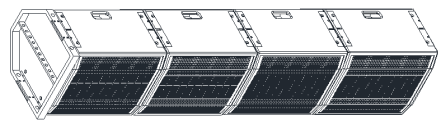

AT-115DSP

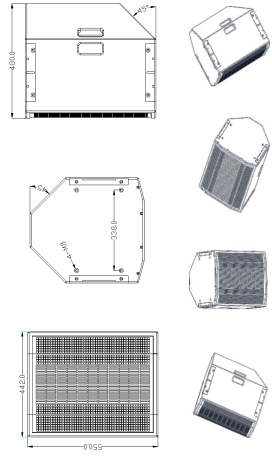

### SPECIFICATIONS

Model	AT-115DSP
Speaker Type	2-Way active speaker
LF	3" Voice Coil Neodymium
HF	15" Neodymium 3" Voice Cone
Frequency Response (±2dB)	55 - 18,000 Hz
Sensitivity(Axis 1m/1w)	106dB
Rated Continuous/Peak power	1000W/2000W/4000W
Max SPL	136dB/139dB/142dB
Horn	Aluminum rotatable horn
Directivity	90x40° rotatable
Amplifier	Class D
Cooling	Single fan
Processor	Control DSP 66 bit
DSP Converter	24 bit
System Presets	Music / Live / Speech
Linker	Dual active, RMS/Peak, Thermal
Crossover Frequency LF-HF	1700 Hz
Cabinet material	Multiplex 18MM Plywood
Handles	2x left side
Dimensions	Width:442 mm Height:350 mm Depth:480 mm
Net Weight	22 kg

**Introduction**  
 MC-115POWER magic speaker is a smart solution for simplifying a live sound system. The MC-115POWER can satisfy acoustic demands either as a main sound reinforcement speaker, a side fill speaker, a monitor or even as a Spatial Image System. Free from traditional sound systems with multiple kinds of speakers, only several pieces of MC-115 POWER can do. This great flexibility will help to save labor cost, transportation cost as well as set up time and significantly improve work efficiency.

