


Column speaker

Column Speaker

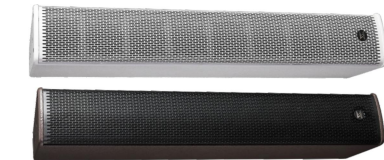


E308 / E308B (white)

- CHARACTERISTIC**
- X3 full range unit, Ferrite magnet.
 - 15mm birch box with coffee color white water paint finish, 1.2 mm thickness iron mesh cover attached with acoustic sponge.
 - Assemble ways: Rigging, mounting on wall, or supporting by pole available.
 - Suitable for auditorium, church, multiple-function room, touring show sound solution.
 - Standard Acquired: GB/T 12060.5-2011 IEC 60268-5:2007 GB/T 9397-2013.


TECHNIQUE INDEX

Model	E304/E304B
Units	4 x 3" full range Italian speakers
Rate Power	60W(AES)
Frequency Response	120Hz - 19kHz
Impedance	8
Sensitivity	94dB
SPL	110dB Continuous/120dB Peak
Coverage (horizontal)	90
Coverage (vertical)	45
Size(LxDxH)mm	12.617.6x42.5x22
Weight(kg)	5

Speaker View

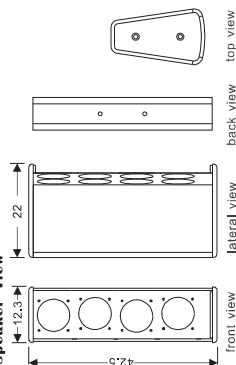

Column Speaker

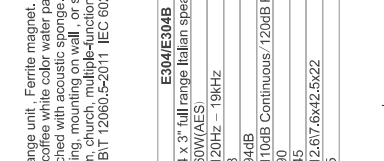

E308 / E308B (white)

- CHARACTERISTIC**
- X3 Italian 3F25 full range unit, Ferrite magnet.
 - 15mm birch box with coffee color white water paint finish, 1.2 mm thickness iron mesh cover attached with acoustic sponge.
 - Assemble ways: Rigging, mounting on wall, or supporting by pole available.
 - Suitable for auditorium, church, multiple-function room, touring show sound solution.
 - Standard Acquired: GB/T 12060.5-2011 IEC 60268-5:2007 GB/T 9397-2013.

TECHNIQUE INDEX

Model	E308/E308B
Units	8 x 3" full range Italian speakers
Rate Power	120W(AES)
Frequency Response	120Hz - 19kHz
Impedance	4
Sensitivity	96dB
SPL	115dB Continuous/121dB Peak
Coverage (horizontal)	90
Coverage (vertical)	45
Size(LxDxH)mm	12.617.6x77x27
Weight(kg)	9.5

Speaker View

