
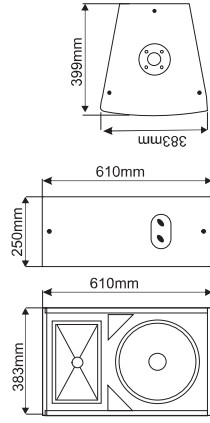



Ex12a Active Speaker With Dsp



TECHNIQUE INDEX

Model	EX12A+ / EX12+ Passive
Drivers	HF:44mm voice core; LF: 156mm magnet/65mm voice core
Frequency Range	45~18kHz
Sensitivity(1w/1m)	96dB
Rated/Continuous/Peak power	200W/400W/800W
Maximum SPL	119dB/122dB/125dB
Pointing characteristic(HxV)	85°x50°
Size(LxDxH)mm	625x385x400
Weight(kg)	28

Bx12a Active Speaker With Dsp

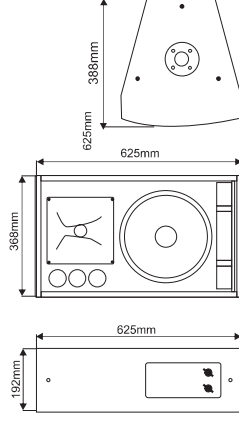

TECHNIQUE INDEX

Model	BX12A+ / BX12+ Passive
Drivers	HF:44mm voice coil; LF: 165mm magnet/65mm voice core
Frequency Range	60~20kHz
Sensitivity(1w/1m)	97dB
Rated/Continuous/Peak power	250W/500W/1000W
Maximum SPL	124dB/127dB/130dB
Pointing characteristic(HxV)	90°x60°
Size(LxDxH)mm	625x368x388mm
Weight(kg)	23