

CHARACTERISTIC


- Single 18 ultra-low-frequency system
- KP-618 is a super low voice loudspeaker system that provides very high power for low-frequency sound expansion.
- There is one 18-inch long stroke low frequency unit in the individual acoustic box, which can load a large amount of power for a long time.
- The box is made of 18mm high-quality plate, and the support is strengthened in the interior of the box, which makes the box produce very small vibration when working at high power. A very shocking performance under very low distortion. The structure of the box is made of 15mm thick high-quality plate, and the interior is strengthened.

Application:

- It can be used in many occasions the sound needs, such as: small flow amplifying system, sound system of the conference room, the small hall sound system, radio, KTV club, theater sound, complement classroom, company office (FOH) in small pa system and distributed system installation etc..
- The box has set up a number of pre installed components for the installation of the loudspeaker for selection, safety and fast.
- It is mainly used for voice expansion, stage back listening, or distributed sound expansion system.

PSRX series

For over a decade, Spirit PSRX series speakers have represented the best performance, highest quality, and most advanced driver technology available to portable PA users. The PSRX700 series continues that tradition and moves the bar even higher. The advanced technology of PSRX700 series speakers delivers the power and performance you would expect from the highest quality, professional systems. At the same time, Spirit innovation and design have reduced system weight so load in and load out are a breeze. All this performance is housed in rugged Spirit enclosures for years of superb performance.

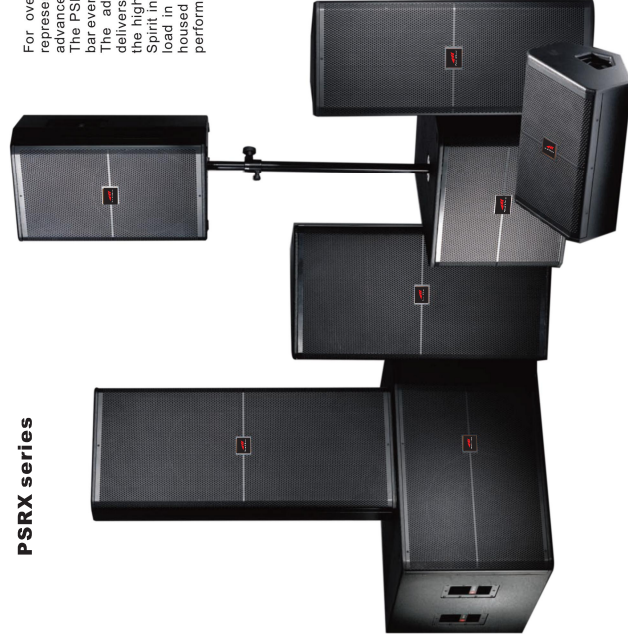

● KP-618 / KP-625

TECHNIQUE INDEX

Model	KP-618	KP-625
Configuration	100 core 220 magnetic LF	75 core 180 magnetic HF 100 core 220 magnetic LF
Frequency/Response	40Hz-200Hz	60Hz-18KHz
Impedance	8	8
Sensitivity	96dB	97dB
Rated/Continuous/Peak power	600W/1200W/2400W	1300W/2600W/5200W
Maximum SPL	124dB/127dB/130dB	128dB/131dB/134dB
Material	18mm Plywood, Aluminum frame	18mm Plywood, Aluminum frame
Size	600x700x540mm	300x340x524mm